
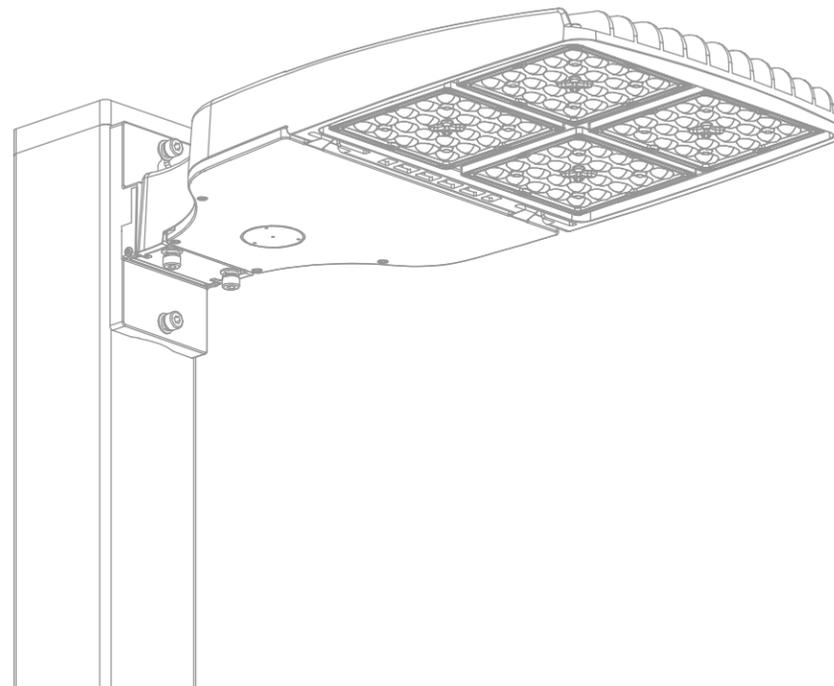


# 2020-1 PRODUCT CATALOGUE

## INDUSTRIAL LIGHTING

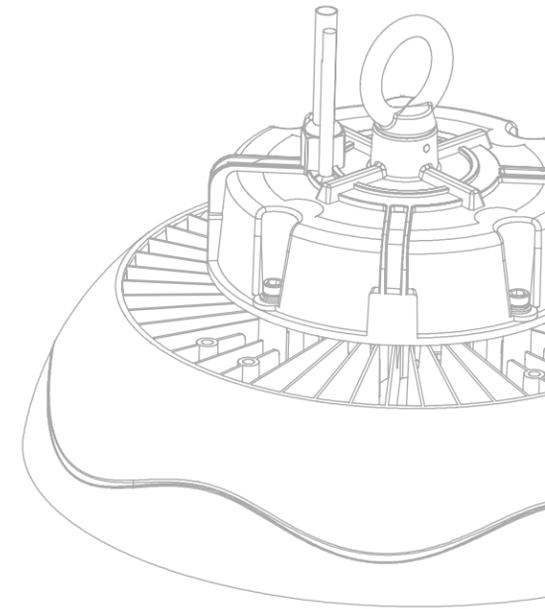

**LED 4 EVERYTHING**

Web: [www.led4everything.com](http://www.led4everything.com)

Mail: [dale@led4everything.com](mailto:dale@led4everything.com)

Phone: 626-589-5583

Add: 2531 Troy ave ste D, south El Monte, CA 91733



# ABOUT US

LED 4 EVERYTHING is committed to create high quality, sustainable and well design industrial lighting which qualified with cULus, cETLus and DLC for utility rebates.

The factory area is around 85,000 square and more than 450 employees. Our R&D team design products that are "Easy Install" for customers. Energy saving is our Number 1 priority for greener and brighter future. OEM and ODM service are available.

We believe that delivering quality products and providing the best service/support is the key to our long-term future success.



## LED Shoebox



**SB01**  
SB01-60W  
SB01-100W  
SB01-120W  
SB01-150W  
SB01-200W  
SB01-240W  
SB01-300W



**SB02**  
SB02-80W  
SB02-100W  
SB02-150W  
SB02-200W  
SB02-240W  
SB02-300W



**SB03**  
SB03-400W  
SB03-450W  
SB03-500W

## LED High Bay



**HB01**  
HB01-100W  
HB01-150W  
HB01-200W  
HB01-240W  
HB01-255W



**HB02**  
HB02-100W  
HB02-150W  
HB02-200W  
HB02-240W  
HB02-255W

## LED Flood Light



**FL01**  
FL01-10W  
FL01-12W  
FL01-20W  
FL01-30W  
FL01-50W



**FL03**  
FL03-60W  
FL03-100W  
FL03-150W  
FL03-200W  
FL03-240W  
FL03-300W

## LED Wall Pack



**WP01**  
WP01-30W  
WP01-40W  
WP01-50W  
WP01-60W  
WP01-80W  
WP01-100W  
WP01-120W



**WP05**  
WP05-20W  
WP05-40W  
WP05-60W  
WP05-80W  
WP05-100W  
WP05-120W



**WP10**  
WP10-30W  
WP10-40W  
WP10-50W  
WP10-60W  
WP10-80W  
WP10-100W  
WP10-120W

# SB01

## LED Shoebox

### DESCRIPTION


LED Shoebox light is perfect fixture for medium height parking lot poles and new construction applications in industrial, warehouse, manufacturing, commercial, office, residential, and hospitality facilities.

### MODEL NUMBER(S)

MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	DISTRIBUTION	VOLTAGE
SB01-60W	60W	7800LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/200-480VAC
SB01-100W	100W	13000LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/200-480VAC
SB01-120W	120W	15600LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/200-480VAC
SB01-150W	150W	19500LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/200-480VAC
SB01-200W	200W	26000LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/200-480VAC
SB01-240W	240W	31200LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/200-480VAC
SB01-300W	300W	39000LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/200-480VAC




### DIMENSIONS

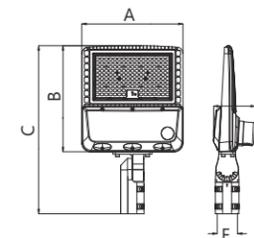

**SB01**  
60W / 100W / 120W / 150W

- A 336mm(13.2")
- B 349mm(13.7")
- C 553mm(21.8")
- D 139mm(5.5")
- E 68mm(2.7")

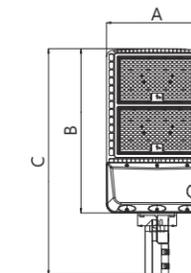

**SB01**  
200W / 240W / 300W

- A 336mm(13.2")
- B 541mm(21.3")
- C 745mm(29.3")
- D 140mm(5.5")
- E 68mm(2.7")

### MOUNTING OPTIONS



SB01-TR



SB01-SF



SB01-DI

### ADDITIONAL ACCESSORY



Photocell



Shorting Cap



Socket base of Photocell



Remote



Lightning arrester



Motion sensor

# SB02

## LED Shoebox

### DESCRIPTION


LED 4 EVERYTHING generation 2nd LED Shoebox parking lot light provides a solution for parking lot and open area applications. Standard finish is dark bronze polyester power finish with other architectural colors available. In addition to diminishing energy costs, the fixtures virtually eliminate maintenance expense with an L70 lifetime of 50,000hours. UL classified, UL listed, DLC premium listed.

### MODEL NUMBER(S)


MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	DISTRIBUTION	VOLTAGE
SB02-80W	80W	11200LM	140	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC
SB02-100W	100W	14000LM	140	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC
SB02-150W	150W	21000LM	140	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC
SB02-200W	200W	28000LM	140	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC
SB02-240W	240W	33600LM	140	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC
SB02-300W	300W	42000LM	140	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC



### DIMENSIONS



**SB02**  
80W / 100W / 150W  
L 450mm(17.72")  
W 290mm(11.42")  
H 60mm(2.36")

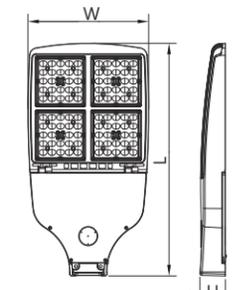

**SB02**  
200W / 240W / 300W  
L 592.4mm(23.34")  
W 310.6mm(12.24")  
H 65.4mm(2.58")

### MOUNTING OPTIONS



SB02-ADI



SB02-DI



SB02-SF



SB02-YM

### ADDITIONAL ACCESSORY



Photocell



Shorting Cap



DIP switch



Motion sensor



Remote



Socket base of Photocell



Lightning arrester



# SB03

## LED Shoebox

### DESCRIPTION


LED 4 EVERYTHING generation 3rd LED shoebox parking lot light provides a solution for parking lot and open area applications. Standard finish is dark bronze polyester power finish with other architectural colors available. In addition to diminishing energy costs, the fixtures virtually eliminate maintenance expense with an L70 lifetime of 50,000hours. UL classified, UL listed, DLC premium listed.

### MODEL NUMBER(S)

MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	DISTRIBUTION	VOLTAGE
SB03-400W	400W	52000LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC
SB03-450W	450W	58500LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC
SB03-500W	500W	65000LM	130	4000K/5000K/5700K	>70	Type III	100-277VAC/277-480VAC



### DIMENSIONS

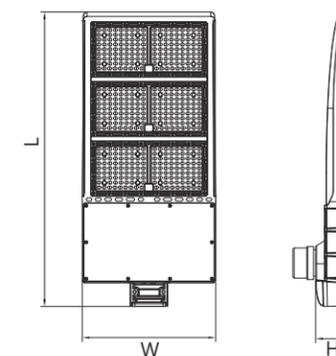

**SB03**  
400W / 450W / 500W  
L 736mm(28.98")  
W 337mm(13.27")  
H 84mm(3.31")

### MOUNTING OPTIONS



SB03-DI



SB03-SF



SB03-TR

# HB01



## LED High Bay

### DESCRIPTION


UFO High Bay light is ideal for replacing HID high bay lights, offering high performance and long life. Various color temperatures and light uniformity will ensure comfortable and safe lighting conditions to maximize productivity in industrial applications.

### MODEL NUMBER(S)

MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
HB01-100W	100W	15000LM	150	4000K/5000K/5700K	>70	120-277VAC/200-480VAC
HB01-150W	150W	22500LM	150	4000K/5000K/5700K	>70	120-277VAC/200-480VAC
HB01-200W	200W	30000LM	150	4000K/5000K/5700K	>70	120-277VAC/200-480VAC
HB01-240W	240W	36000LM	150	4000K/5000K/5700K	>70	120-277VAC/200-480VAC
HB01-255W	255W	38250LM	150	4000K/5000K/5700K	>70	120-277VAC/200-480VAC



### DIMENSIONS




#### HB01

100W / 150W

A  $\varnothing$ 294.6mm(11.61")

B 209.5mm(8.25")

C 81mm(3.19")

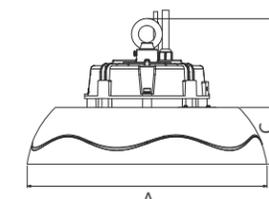

#### HB01

200W / 240W / 255W

A  $\varnothing$ 350.0mm(13.79")

B 221.0mm(8.71")

C 82.0mm(3.23")

### MOUNTING OPTIONS



Ceiling with loop



Ceiling with hook



Wall Mounting



Pendant Mounting

### ADDITIONAL ACCESSORY



PC cover model



Motion sensor



Remote

# HB02

## LED High Bay

### DESCRIPTION



LED 4 EVERYTHING UFO style Generation 2nd High Bay LED luminaires are compact, lightweight for easy install, and suitable for up to 35 foot mounting heights. Available in two sizes. UL/cUL/CE/RoHS/DLC premium qualified with available models delivering 14,000 to 35,700 lumens. The luminaire offers a 50,000 hour life rating and is suitable for elevated ambient temperatures.

### MODEL NUMBER(S)

MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
HB02-100W	100W	14000LM	140	4000K/5000K/5700K	>70	100-277VAC
HB02-150W	150W	21000LM	140	4000K/5000K/5700K	>70	100-277VAC
HB02-200W	200W	28000LM	140	4000K/5000K/5700K	>70	100-277VAC
HB02-240W	240W	33600LM	140	4000K/5000K/5700K	>70	100-277VAC
HB02-255W	255W	35700LM	140	4000K/5000K/5700K	>70	100-277VAC



### DIMENSIONS

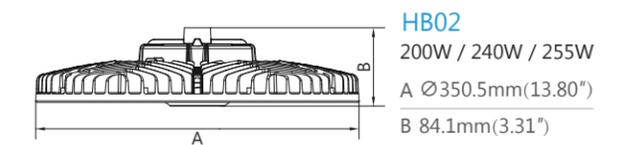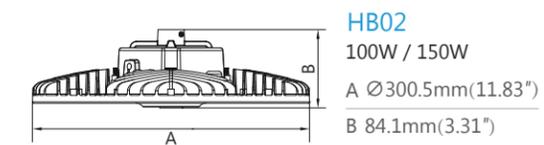

### MOUNTING OPTIONS



Ceiling with loop



Ceiling with hook

### ADDITIONAL ACCESSORY



PC cover model



Motion sensor



Remote

# FL01

## LED Flood Light

### DESCRIPTION


Ideal for general lighting, alleys, bading docks, doorways, pathways. Replace existing HID floodlight. Solid state lighting technology for long life, low maintenance and high efficiency.

### MODEL NUMBER(S)

MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
FL01-10W	10W	1200LM	120	4000K/5000K/5700K	>70	100-277VAC
FL01-12W	12W	1440LM	120	4000K/5000K/5700K	>70	100-277VAC
FL01-20W	20W	2400LM	120	4000K/5000K/5700K	>70	100-277VAC
FL01-30W	30W	3600LM	120	4000K/5000K/5700K	>70	100-277VAC
FL01-50W	50W	6000LM	120	4000K/5000K/5700K	>70	100-277VAC



### DIMENSIONS

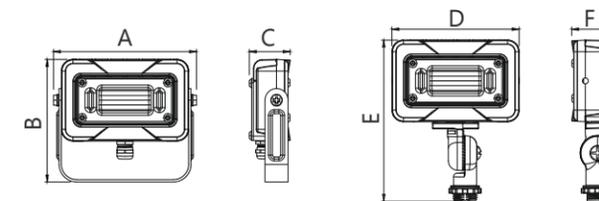

	FL01-10W	FL01-12W	FL01-20W	FL01-30W	FL01-50W
A	124mm(4.88")	124mm(4.88")	186mm(7.32")	186mm(7.32")	217mm(8.54")
B	105mm(4.13")	105mm(4.13")	164mm(6.46")	164mm(6.46")	191mm(7.52")
C	35mm(1.38")	35mm(1.38")	51mm(2.01")	51mm(2.01")	58mm(2.28")
D	110mm(4.33")	110mm(4.33")	170mm(6.69")	170mm(6.69")	200mm(7.87")
E	148mm(5.83")	148mm(5.83")	186mm(7.32")	186mm(7.32")	205mm(8.07")
F	37mm(1.46")	37mm(1.46")	51mm(2.01")	51mm(2.01")	58mm(2.28")


### MOUNTING OPTIONS



U Bracket



1/2 Knuckle Mount

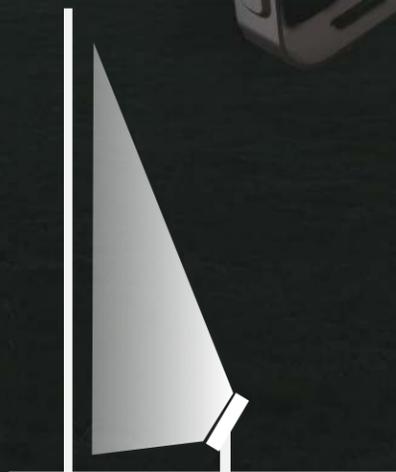

# FL03



## DESCRIPTION


LED 4 EVERYTHING LED Flood Lights are rugged aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. It is suitable for most outdoor and area lighting application including wet conditions. In addition to diminishing energy costs, the fixtures virtually eliminate maintenance expenses with an L70 lifetime of 50,000 hours.

## MODEL NUMBER(S)

MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	DISTRIBUTION	VOLTAGE
FL03-60W	60W	7800LM	130	3000K/4000K/5000K/5700K	>70	7H7V	100-277VAC/200-480VAC
FL03-100W	100W	13000LM	130	3000K/4000K/5000K/5700K	>70	7H7V	100-277VAC/200-480VAC
FL03-150W	150W	19500LM	130	3000K/4000K/5000K/5700K	>70	7H7V	100-277VAC/200-480VAC
FL03-200W	200W	26000LM	130	3000K/4000K/5000K/5700K	>70	7H7V	100-277VAC/200-480VAC
FL03-240W	240W	31200LM	130	3000K/4000K/5000K/5700K	>70	7H7V	100-277VAC/200-480VAC
FL03-300W	300W	39000LM	130	3000K/4000K/5000K/5700K	>70	7H7V	100-277VAC/200-480VAC




## DIMENSIONS

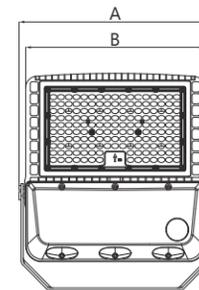

### FL03

60W / 100W / 150W

A 361.9mm(14.25")	C 403.3mm(15.88")
B 336.1mm(13.23")	D 83.4mm(3.28")

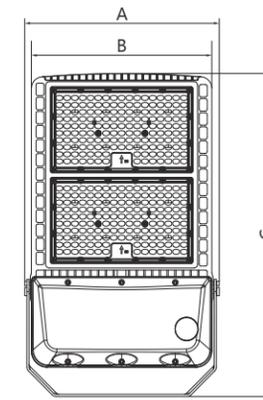

### FL03

200W / 240W / 300W

A 362.6mm(14.27")	C 596.0mm(23.46")
B 336.1mm(13.23")	D 84.7mm(3.33")

# WP01



## DESCRIPTION



Wall Pack light is one of the most dependable lights for security lighting luminaire. It is designed for areas like outdoor lighting and courtyard illumination. CCT, Watt adjustable by DIP Switch.

## MODEL NUMBER(S)

MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
WP01-30W	30W	3750LM	125	3000K/4000K/5000K/5700K	>70	120-277VAC/200-480VAC/120-347VAC
WP01-40W	40W	5000LM	125	3000K/4000K/5000K/5700K	>70	120-277VAC/200-480VAC/120-347VAC
WP01-50W	50W	6250LM	125	3000K/4000K/5000K/5700K	>70	120-277VAC/200-480VAC/120-347VAC
WP01-60W	60W	7500LM	125	3000K/4000K/5000K/5700K	>70	120-277VAC/200-480VAC/120-347VAC
WP01-80W	80W	10000LM	125	3000K/4000K/5000K/5700K	>70	120-277VAC/200-480VAC/120-347VAC
WP01-100W	100W	12500LM	125	3000K/4000K/5000K/5700K	>70	120-277VAC/200-480VAC/120-347VAC
WP01-120W	120W	15000LM	125	3000K/4000K/5000K/5700K	>70	120-277VAC/200-480VAC/120-347VAC



## DIMENSIONS

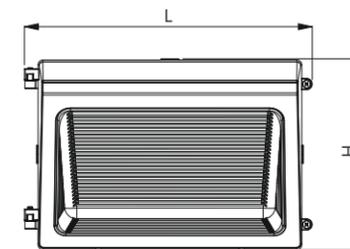

**WP01**  
 30W / 40W / 50W / 60W / 80W / 100W / 120W  
 L 362.0mm(14.25")  
 W 192.0mm(7.56")  
 H 237.7mm(9.36")

## ADDITIONAL ACCESSORY



Photocell



Motion sensor



DIP switch

# WP05

## LED Adjustable Wall Pack

### DESCRIPTION


LED 4 EVERYTHING LED Adjustable Wall Packs provide die-casting aluminum alloy heat sink. Adjustable direction can be available from 0-90 degree, so forward throw illumination can be precisely aimed. This is an ideal commercial outdoor fixture for buildings. CCT, Watt adjustable by DIP Switch.

### MODEL NUMBER(S)


MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	DISTRIBUTION	VOLTAGE
WP05-20W	20W	2800LM	140	4000K/5000K/5700K	>70	Type II	120-277VAC/120-347VAC
WP05-40W	40W	5600LM	140	4000K/5000K/5700K	>70	Type II	120-277VAC/120-347VAC
WP05-60W	60W	8400LM	140	4000K/5000K/5700K	>70	Type II	120-277VAC/120-347VAC
WP05-80W	80W	11200LM	140	4000K/5000K/5700K	>70	Type II	120-277VAC/120-347VAC
WP05-100W	100W	14000LM	140	4000K/5000K/5700K	>70	Type II	120-277VAC/120-347VAC
WP05-120W	120W	16800LM	140	4000K/5000K/5700K	>70	Type II	120-277VAC/120-347VAC




### DIMENSIONS

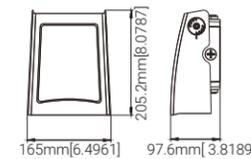

WP05-20W / WP05-40W  
(120-277VAC&120-347VAC)

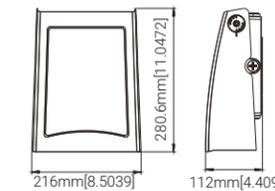


WP05-60W  
(120-277VAC&120-347VAC)  
WP05-80W  
(120-277VAC)

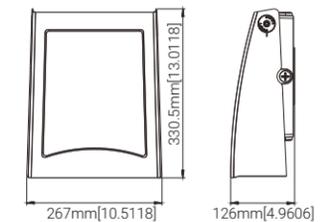

WP05-80W  
(120-347VAC)  
WP05-100W / WP05-120W  
(120-277VAC&120-347VAC)

### FEATURES:

Adjustable direction can be available from 0-90 degree

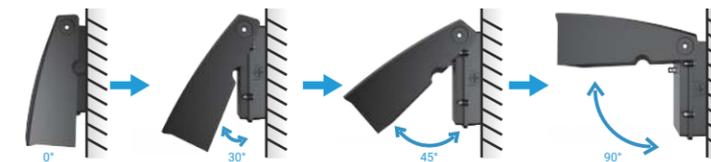

### ADDITIONAL ACCESSORY



DIP switch



Photocell

# WP10



## LED Full Cut-Off Wall Pack

### DESCRIPTION



LED Full Cut-Off Wall Pack is a high efficient lighting solution that provides a long-lasting and energy-saving. The rugged housing offers advanced thermal management and protection against outdoor environments without compromising aesthetics. CCT, Watt adjustable by DIP Switch.

### MODEL NUMBER(S)

MODEL	WATTS	LUMENS	LM/WATT	CCT	CRI	DISTRIBUTION	VOLTAGE
WP10-30W	30W	3900LM	130	4000K/5000K/5700K	>70	Type III	120-277VAC/120-347VAC
WP10-40W	40W	5200LM	130	4000K/5000K/5700K	>70	Type III	120-277VAC/120-347VAC
WP10-50W	50W	6500LM	130	4000K/5000K/5700K	>70	Type III	120-277VAC/120-347VAC
WP10-60W	60W	7800LM	130	4000K/5000K/5700K	>70	Type III	120-277VAC/120-347VAC
WP10-80W	80W	10400LM	130	4000K/5000K/5700K	>70	Type III	120-277VAC/120-347VAC
WP10-100W	100W	13000LM	130	4000K/5000K/5700K	>70	Type III	120-277VAC/120-347VAC
WP10-120W	120W	15600LM	130	4000K/5000K/5700K	>70	Type III	120-277VAC/120-347VAC



### DIMENSIONS



#### WP10



30W / 40W / 50W / 60W  
(120-277VAC&120-347VAC)

80W  
(120-277VAC)

L 220.9(8.71")

W 170.9mm(6.73")

H 230.5mm(9.08")

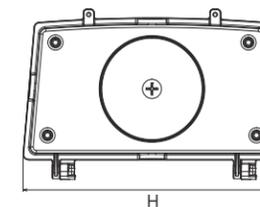

#### WP10

80W  
(120-347VAC)

100W / 120W  
(120-277VAC&120-347VAC)

L 233.8(9.21")

W 183.3mm(7.22")

H 280.4mm(11.05")

### ADDITIONAL ACCESSORY



DIP switch



Motion sensor




Photocell




Remote


# SB01

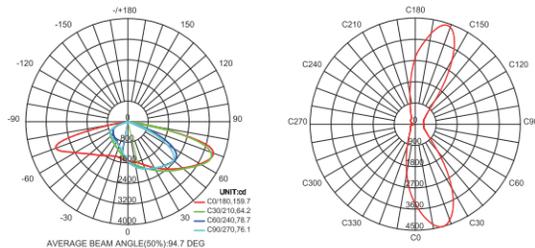


SB01-60W-5000K

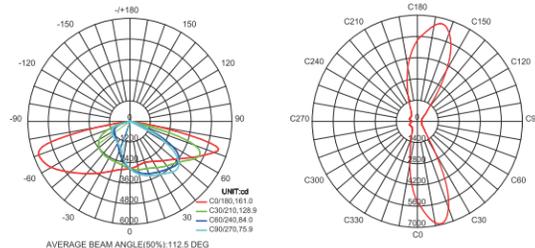


SB01-100W-5000K

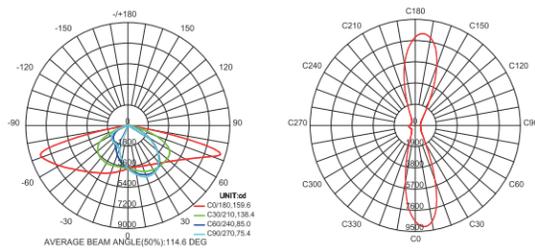


SB01-120W-5000K

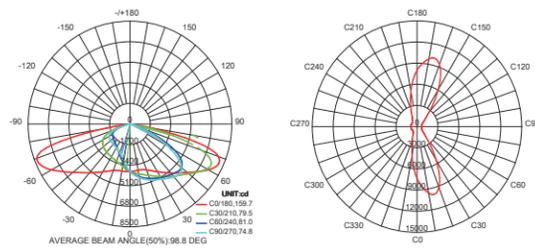


SB01-150W-5000K

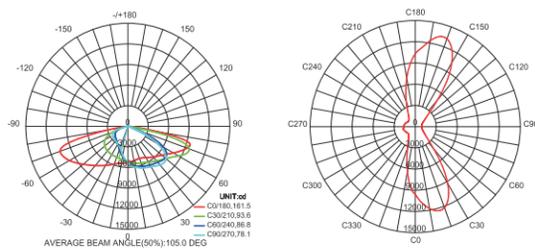

SB01-200W-5000K

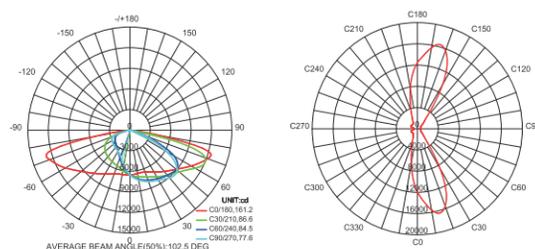


SB01-240W-5000K

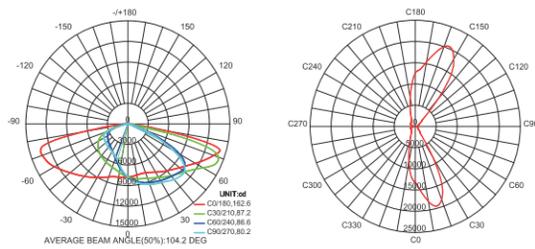


SB01-300W-5000K


# HB01

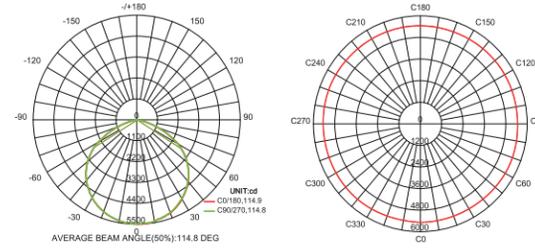


HB01-100W-5000K

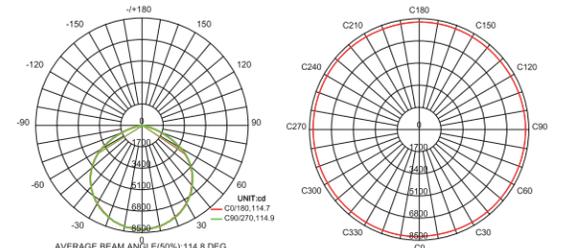


HB01-150W-5000K

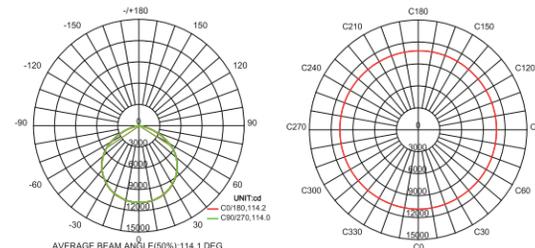

HB01-200W-5000K

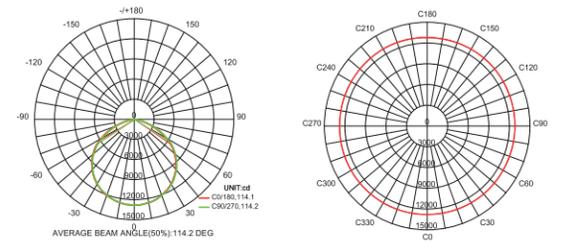


HB01-240W-5000K

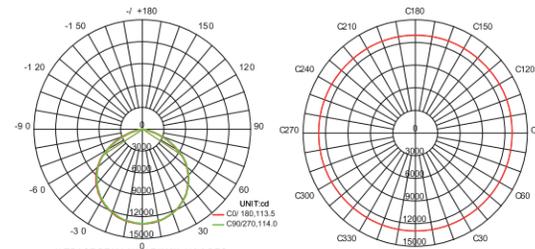


HB01-255W-5000K


# WP01

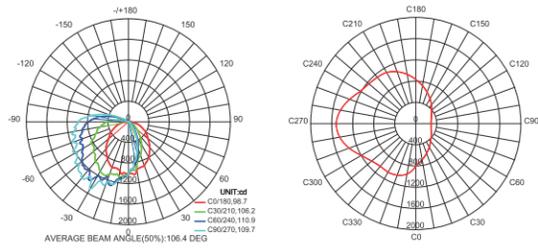


WP01-30W-5000K

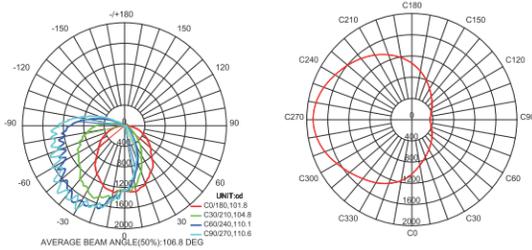


WP01-40W-5000K

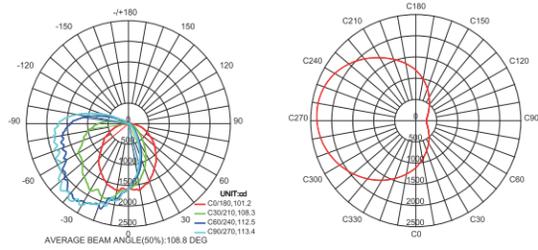


WP01-50W-5000K

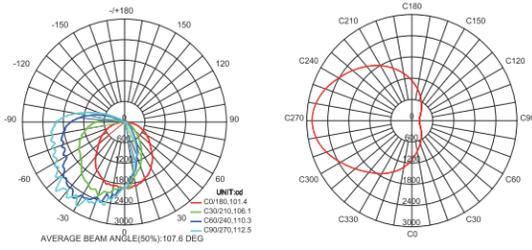


WP01-60W-5000K

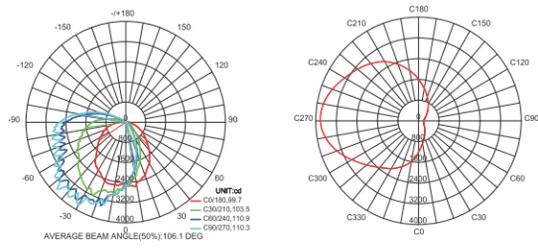

WP01-80W-5000K

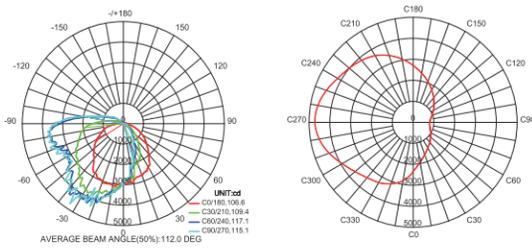


WP01-100W-5000K

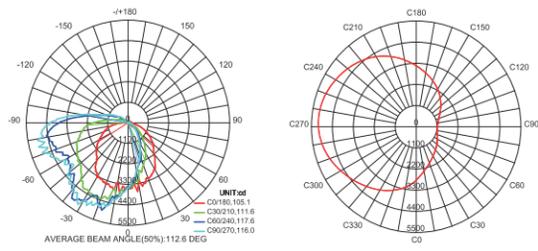


WP01-120W-5000K


# WP05

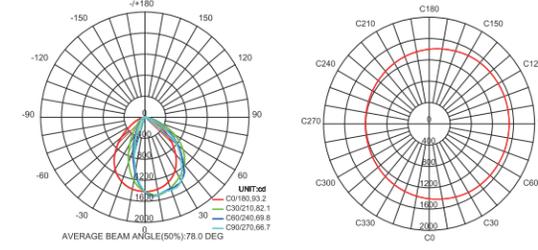


WP05-20W-5000K

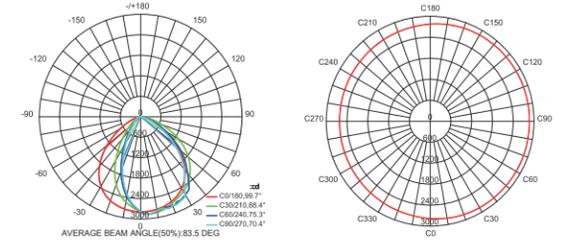


WP05-40W-5000K

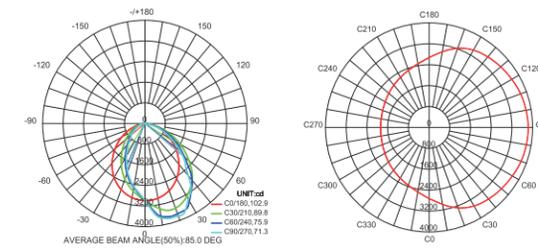


WP05-60W-5000K

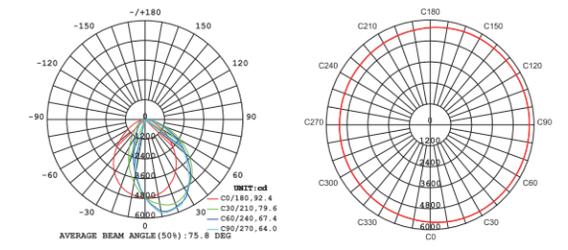

WP05-80W-5000K

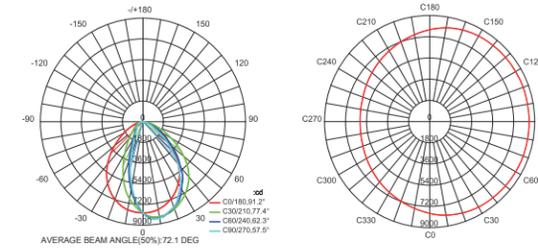

WP05-100W-5000K

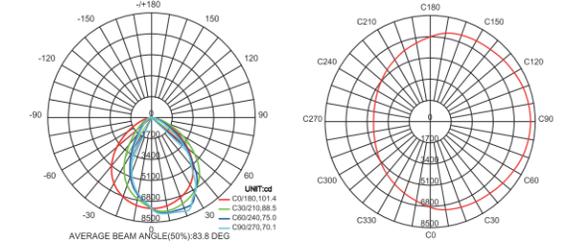

WP05-120W-5000K

